

DATA SHEET

SKY GARDEN INSPECTION CHAMBER IC01


Version 1.0

SKY GARDEN INSPECTION CHAMBER

Standard Inspection chamber Consisting of base section, side section and lockable cover for use with green roofs to allow inspection of roof drainage outlets.

INSTALLATION

- Join individual shaft elements by pushing them together until they click into place.
- When using drainage filler material or single layer build ups: Place the shaft directly on the water proofing and install the Triangle water conduits
- When using the drainage elements cut out a 35 x 35 cm section above the outlet and position the shaft on the drainage element and filter fleece on top of the outlet.

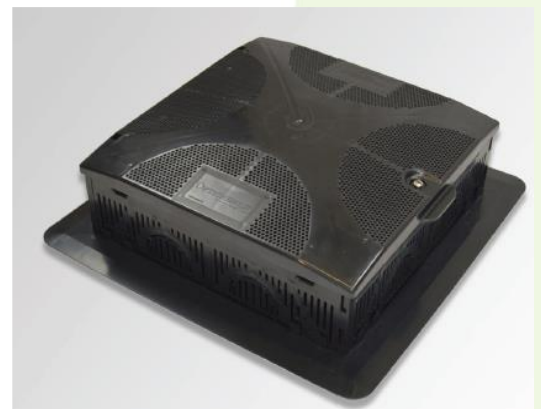

TECHNICAL PROPERTIES

Technical Details	
Material	ABS Recycled Plastic
Colour	Black

Dimensions	
Chamber Cross Section	370 mm 370 mm
Base Component Floor Area	470 mm x 470 mm
Height	110 mm (can be raised in 100 mm increments)
Chamber Base Opening	300 mm Diameter
Compressive Strength	Approx. 150 kg (Plastic Cover)
Unit Weight	2.4 kg



T 01242 620905
E enquiries@sky-garden.co.uk

Head Office

Unit 3, Miller Court
 Tewkesbury, Gloucestershire,
 GL20 8DN

01242 620905

London Office

Kemp House,
 152 City Road,
 London. EC1V 2NX

02035 030927

